

GAIAGRID 6400 OLT (CWDM)



The GAIAGRID 6400 CWDM based OLT offers 8 PAU+SWT+2MPU+2PSU Board

The GAIAGRID 6400 CWDM based OLT is a useful product where the network of computers, automation, intelligent traffic systems, semiconductors and heavy plant equipment, ships.



When the equipment failure does not affect to the next node.

Specification

Parameter	GAIAGRID 6400
Standard	IEEE802.3/3u/3ab/3z 10Base-T/100Base-TX/1000Base-T IEEE802.1d/w spanning tree protocol IEEE802.1Q VLAN IEEE802.3ad Link aggregation
Interface	<ul style="list-style-type: none">▪ 2 port 1000Base-X CWDM▪ 16 port 10/100/1000Base-T Up-link RJ-45▪ 2 port 1000Base-X Up-link▪ 1 port Consol per MPU (RJ-45)
Switch Fabric	224Gbps
Topology	Ring , BUS, ETC
Layer 2	Management interface : RS232 console, Web browser, SNMP v1, v2 VLAN: 4K, IGMP snooping Spanning Tree : IEEE802.1D, IEEE802.1w
Dimension	W*D*H 440(W) * 355(H) * 435(D) / 8U, 19" Rack Type
Power Input Voltage	+ - DC 48V dual Power
Operating Environment	Temperature : -40-80 Humidity : 5-90%
Storage Environment	Temperature : -45-85°C Humidity : 5-90% (Non-condensing)

GAIAGRID 6400 OLT (CWDM)

Topology

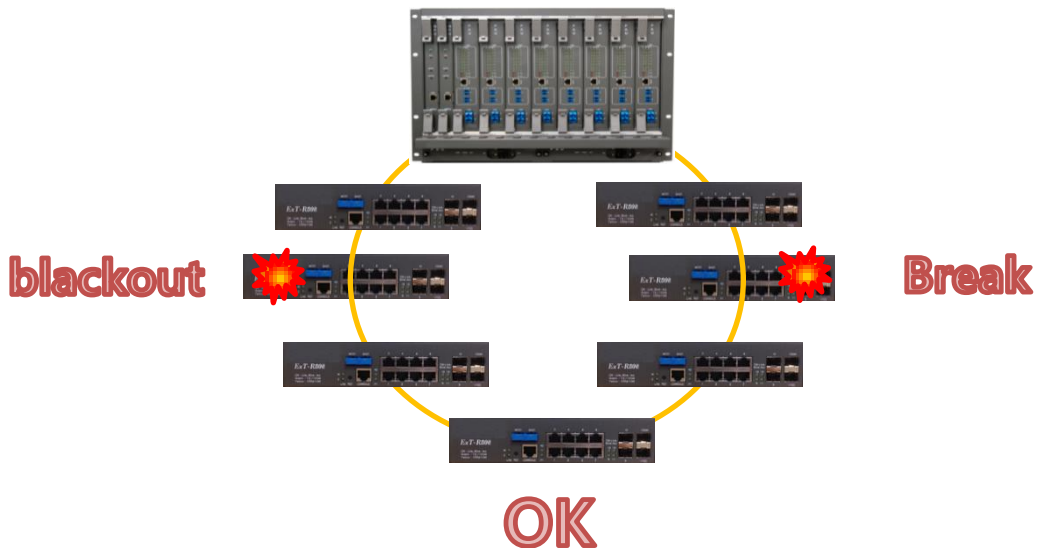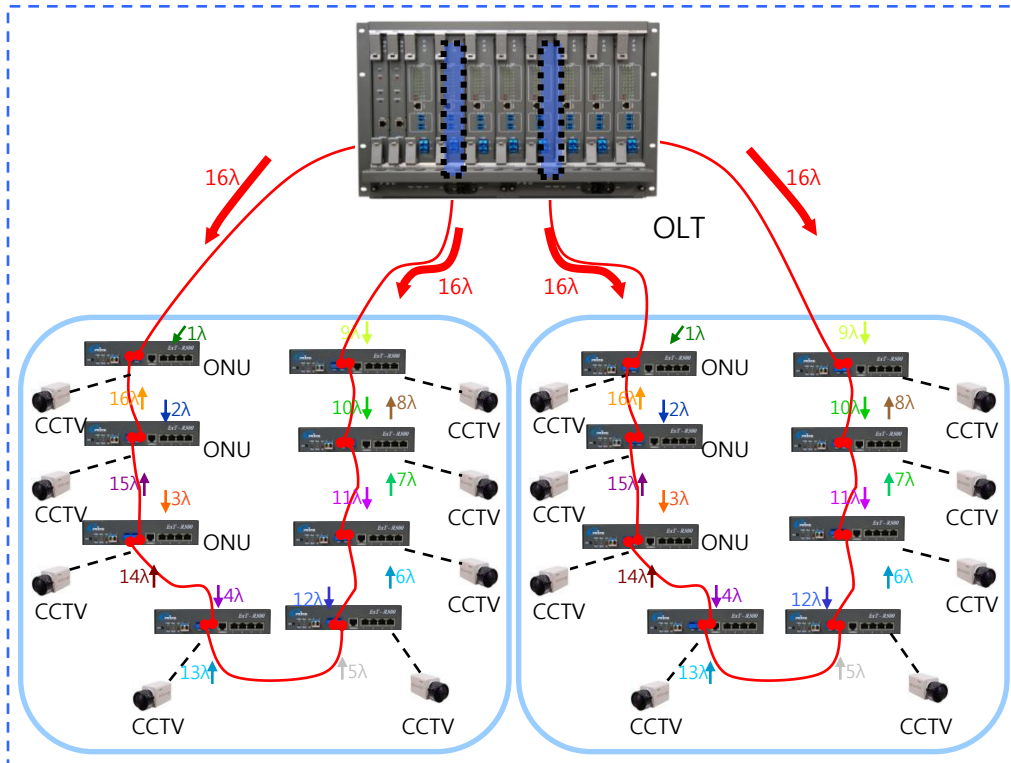

For additional information or to purchase the product, please contact us ;
Seahyun Korea (www.Shyn.co.kr)

